

5G_industrial_router, SDX62 5G chip, 4x4 DL mimo, 2x2 UL mimo, SDX62 5G module

TeleWell 5G industrial router

LAN 2 x 1 GB ethernet

5G 1Gb dl, ul 300Mbps, **4x4 Mimo DL and 2x2 UL
mimo**

NR5G NSA (+ 3-4 X LTE CA) and Nr5G SA
Supported bands, Qualcomm sdx62 chip

NR 5G SA 2 x Carrier Aggregation (CA)

PoE power(option) , DIN mounting


2 SIM slot for 2 different operator

2x2 2,4 Ghz Wifi for remote management

Firewall mode or Pure Bridge mode

Multiband antenna 700Mhz - 3500 Mhz 4G/5G 4x4
Mimo SMA connctor

2 x Wifi 2.4 Ghz SMA connector

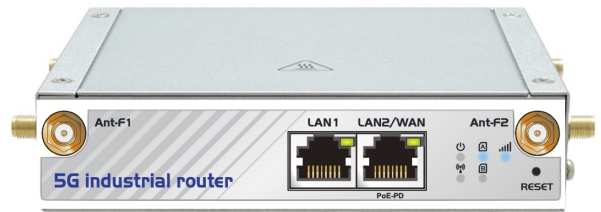

Technical specifications

5G industrial router

LAN 2 x 1 GB ethernet

5G x 1Gb , Wireguard and VPN support

Nr5G NSA (+ 2 LTE CA) and Nr5G SA, (list of supported bands)

PoE power , DIN mounting

2 SIM slot for 2 different operator

2x2 2,4 Ghz Wifi for remote management

Firewall mode or Pure Bridge mode

Size: height 3 cm, width 15 cm, depth 10,1 cm

Weight 0,450kg

Din rail connector

Power with power adapter 12v DC 2.5A 30 W max

or PoE feeding same