


Taiwan QUECTEL office front door




Test tool iPerf & JPerf2.0.2

Test topology

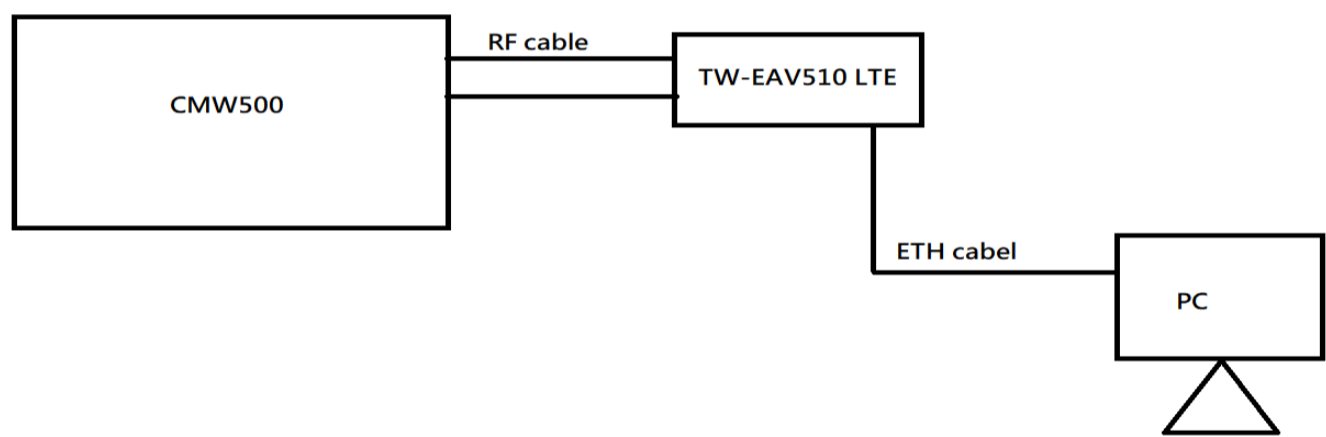

Actual environment

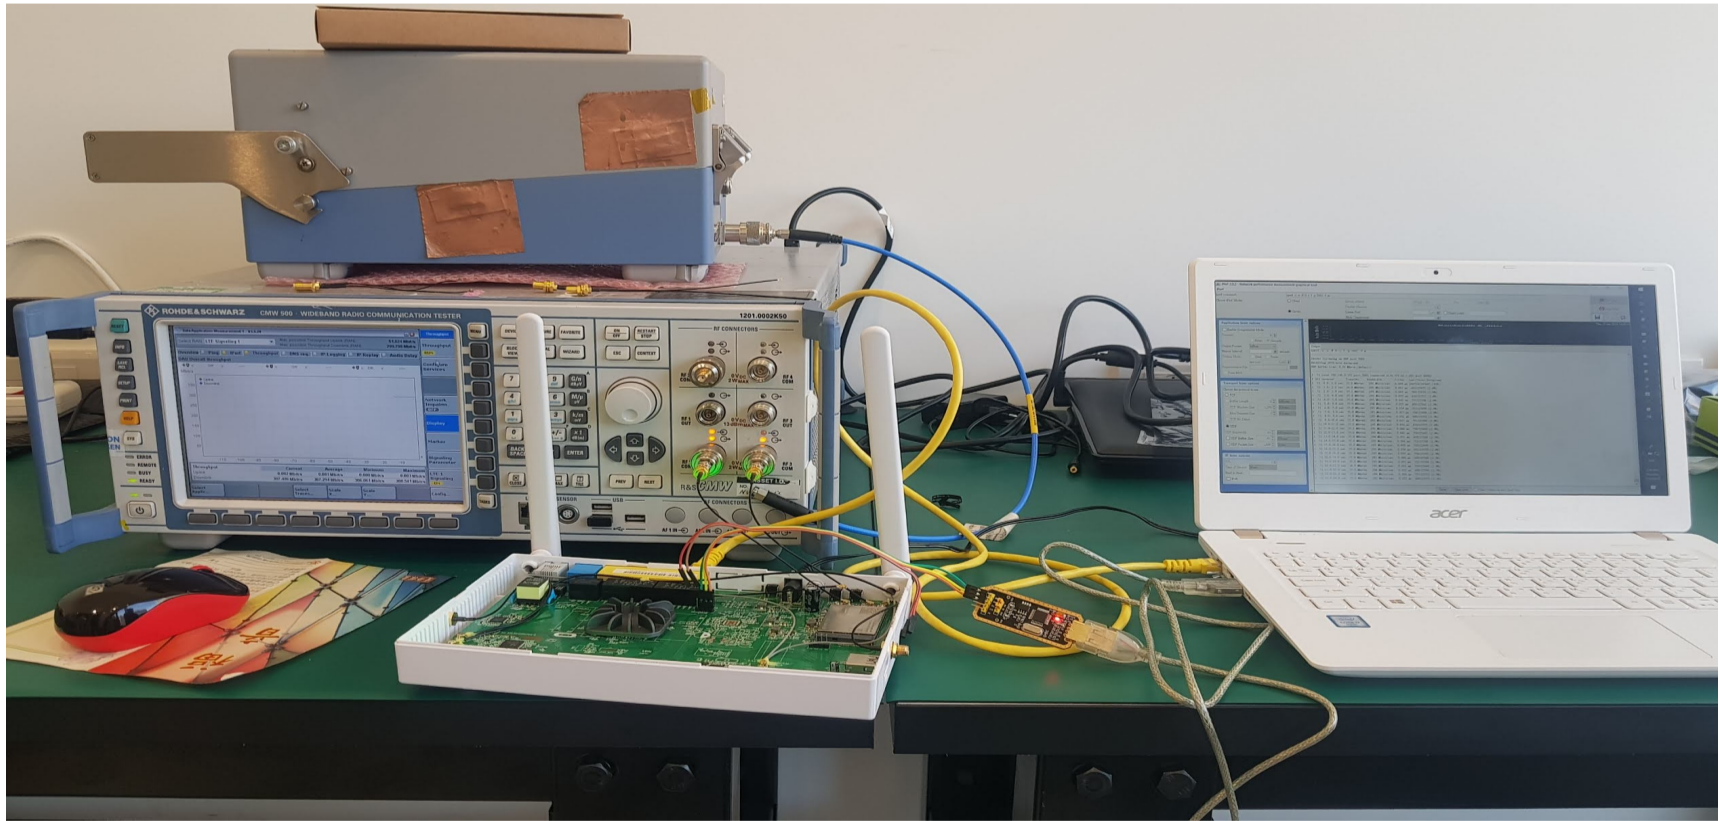

Test Environment Setup	FDD	DL	MAX 300Mbps
		UL	MAX 50Mbps
	TDD	DL	MAX 203Mbps
		UL	MAX 20Mbps

Result

FW Version	Frequency Band		
1.1.00-53	B3 20M+ B7 20M		
TCP	Uploda	49.8M	99,60 %
	Download	280M	93,33 %
FW Version	Frequency Band		
1.1.00-53	B38 20M+ B38 20M		
TCP	Uploda	20.2M	101,00 %
	Download	196M	96,55 %

version	Frequency Band
1.1.00-53	BAND3 20M+ BAND7 20M

Spec

EP06-E

FDD

DL

UL


MAX 300Mbps

MAX 50Mbps


PC(client) to CMW500(server)

1 pair, TCP Upload

Result: 49.8M

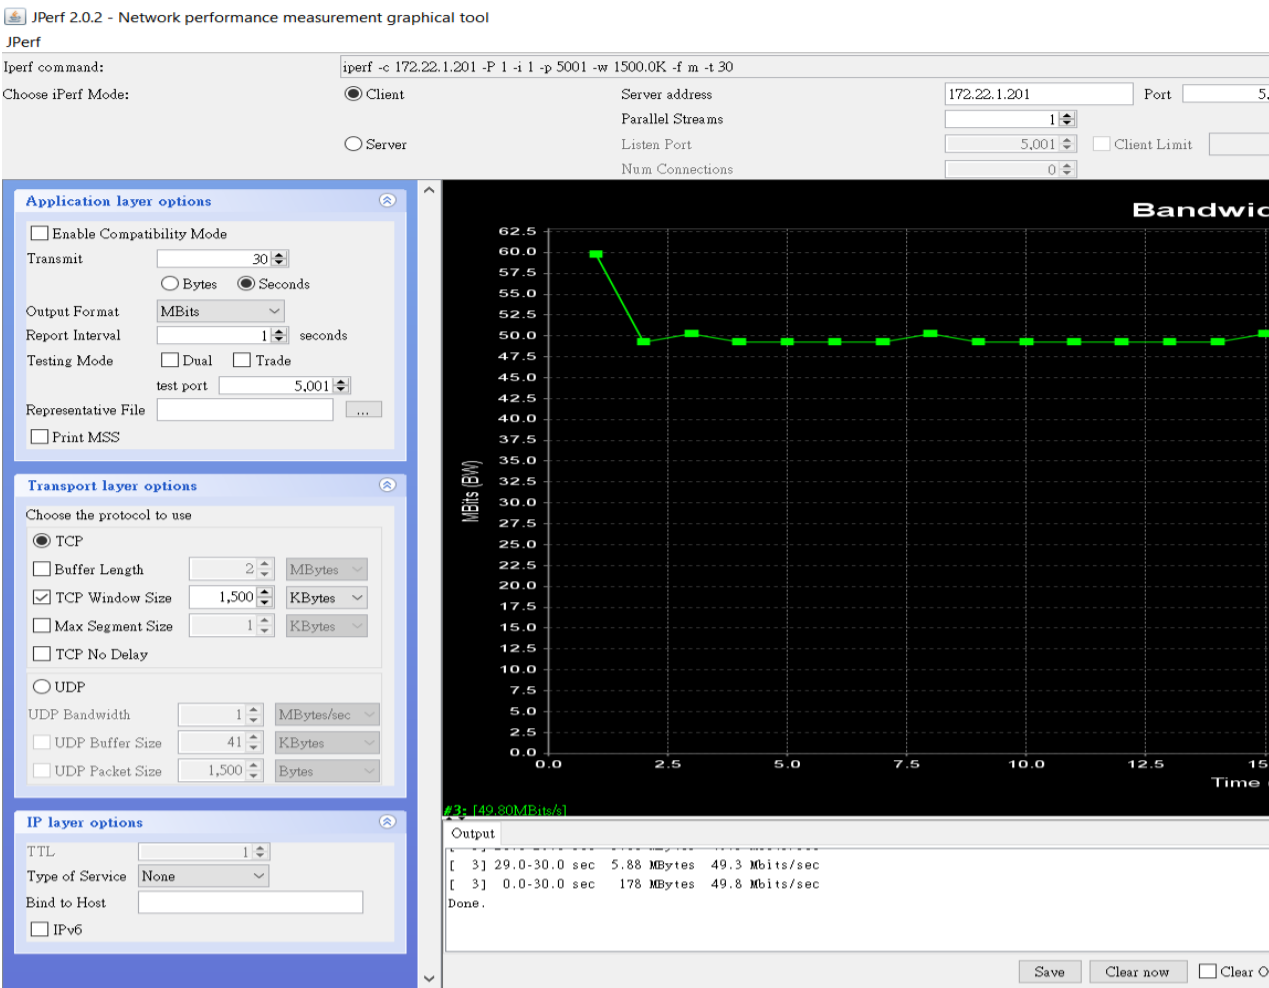

CMW500 screen

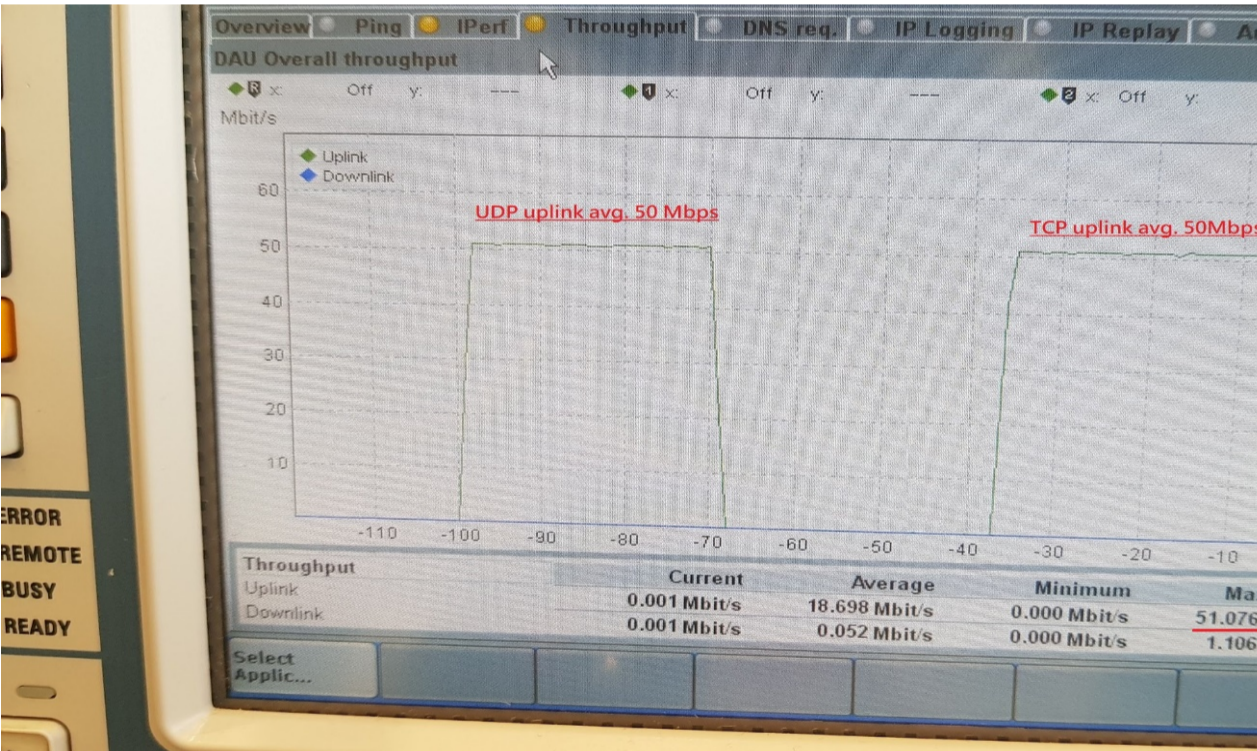

CMW500(client) to PC(server)

1 pair, TCP Download

Result: 280M

